



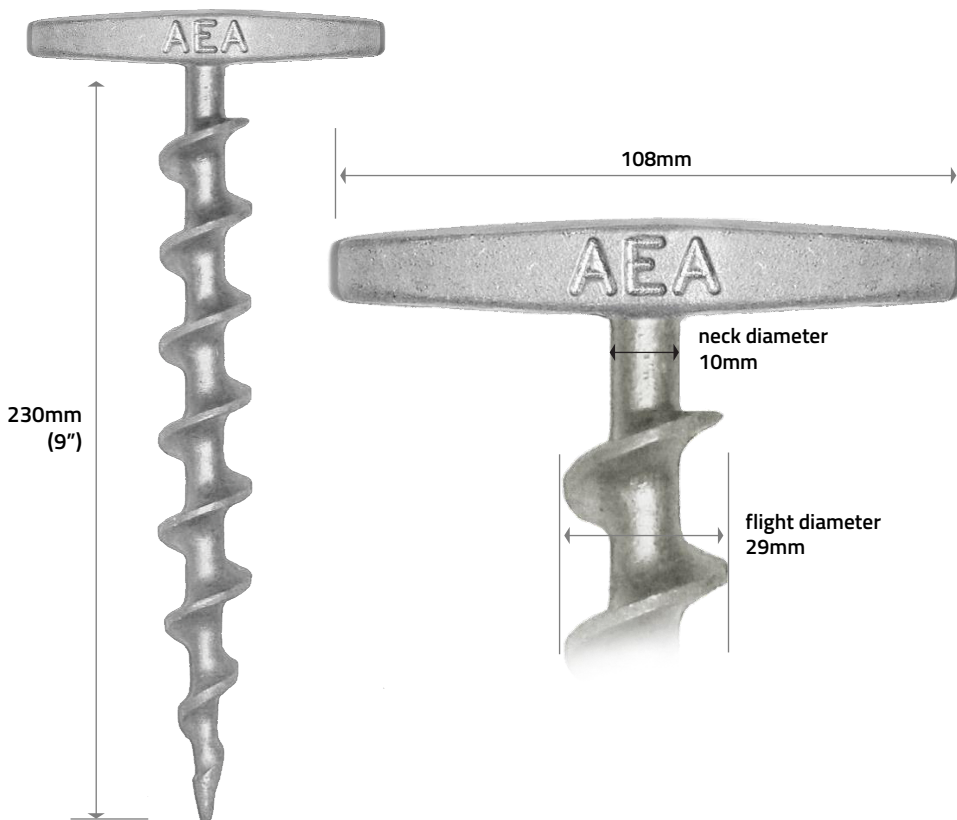


PE9T specifications

- Aircraft-quality cast aluminium 356 alloy
- Heat-treated to T6 specification
- Removable

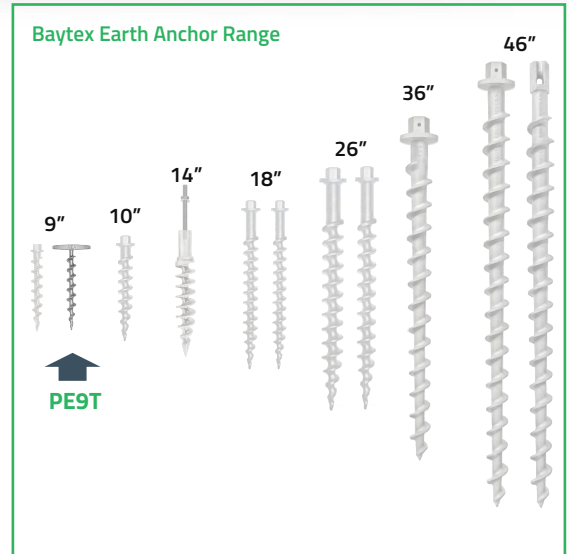

LOAD CAPACITY ↑
Pullout strength with flight fully embedded




	PE9T	
	23cm (9")	
SOIL CLASS		
1 hardpan/ashphalt/clay		1.78 kN (181 kg)
2 Cohesive soil		0.89 kN (91 kg)
3 Medium density soil		0.44 kN (45 kg)
4 Loose med-to-fine sand		0.44 kN less than (45 kg)
5 Loose fine uncompact sand		0.44 kN less than (45 kg)

Earth Anchors - PE9T

SIMPLICITY · PERFORMANCE · STYLE



PE9T installation



install by hand

accessories purchased separately



10" Tie-off cable

application suggestions



camping



pop-up tents



beach shelters



awnings



dog tie down

New Zealand

52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
fax +64 7 579 0194
www.baytex.co.nz

Australia

tel 02 4340 4144
mob 0400 312 314

