

# MOD TRIPLE RAIL

## Lining Instructions

---



SIMPLICITY · PERFORMANCE · STYLE

---

### New Zealand


52 Newton Street,  
PO Box 4370, Mount Maunganui  
New Zealand

tel +64 7 579 0190  
fax +64 7 579 0194  
[www.baytex.co.nz](http://www.baytex.co.nz)


### Australia

tel 02 4340 4144  
mob 0400 312 314


13. Connect Sister Clips
14. Pull Liner out to Eave Rail  
- Attach Bungy Hook
15. Attach some Structure Hooks
16. Velcro Panels together

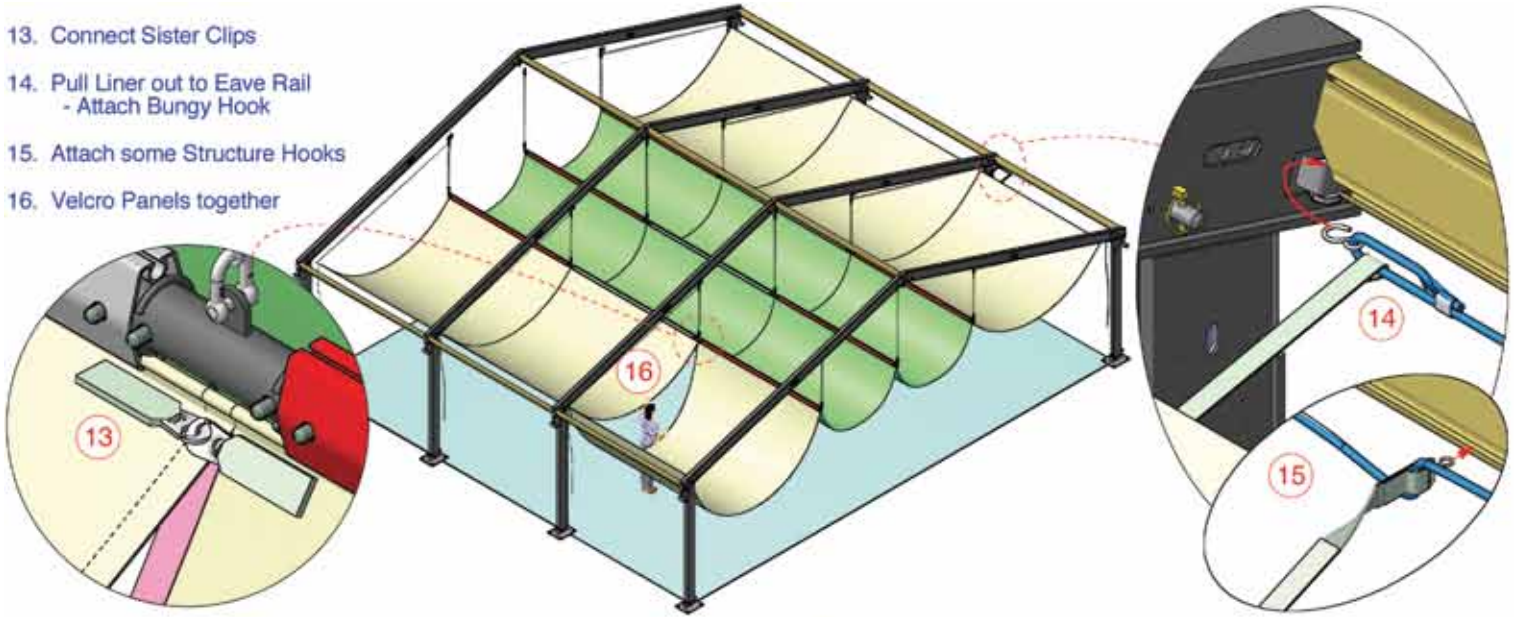


17. Attach Gable Infill & Insert to End Connector  
-Use Lynch Pin
18. Connect Sister Clips
19. Fasten Corner Strap to Leg  
- thread through Cambuckle
20. Velcro Panels together

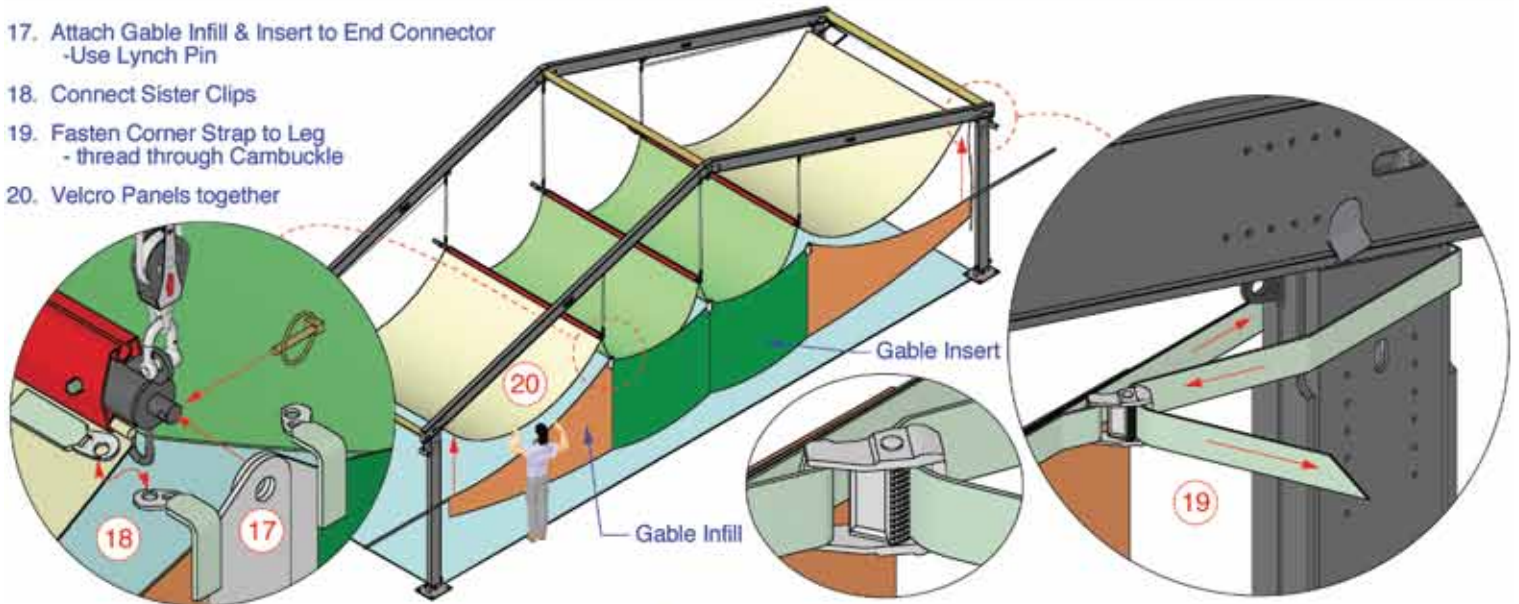

21. Attach balance of Structure Hooks  
-twist to insert
22. Raise Liner to Finished Height  
-Gable Eave Line is Straight
23. Tie Up Halyards at Eave  
-out of sight

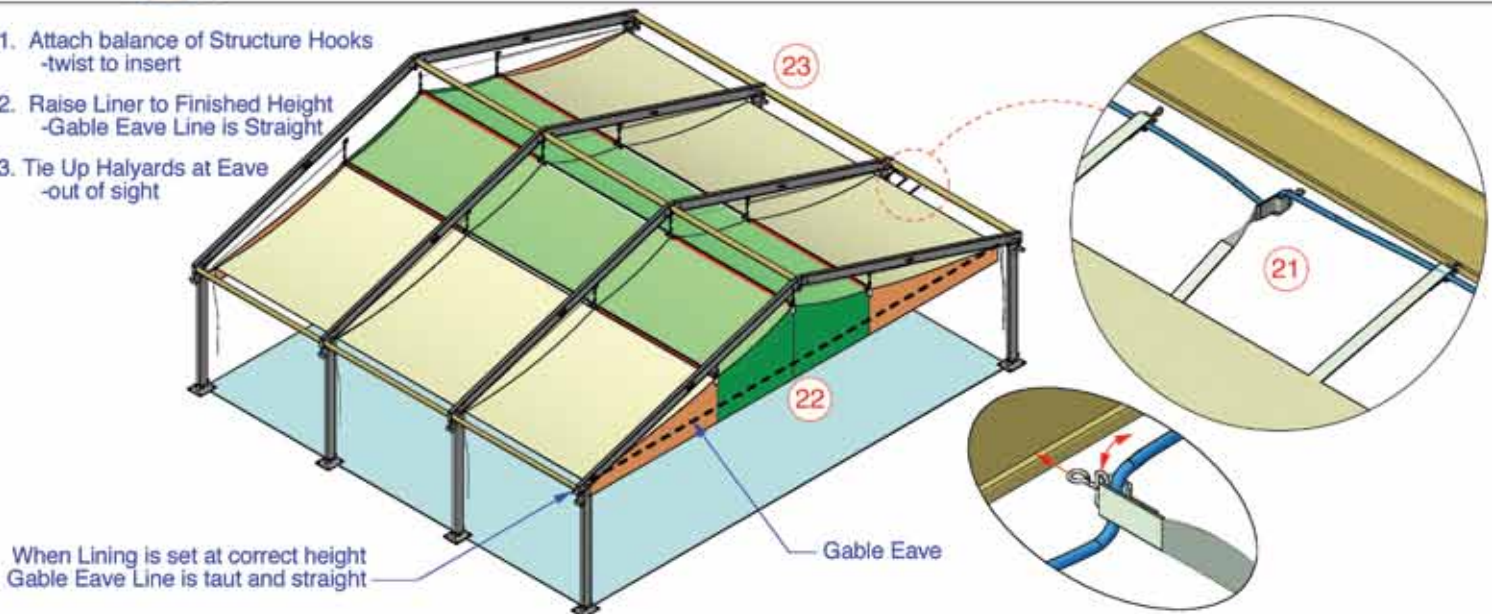

# Parts Guide

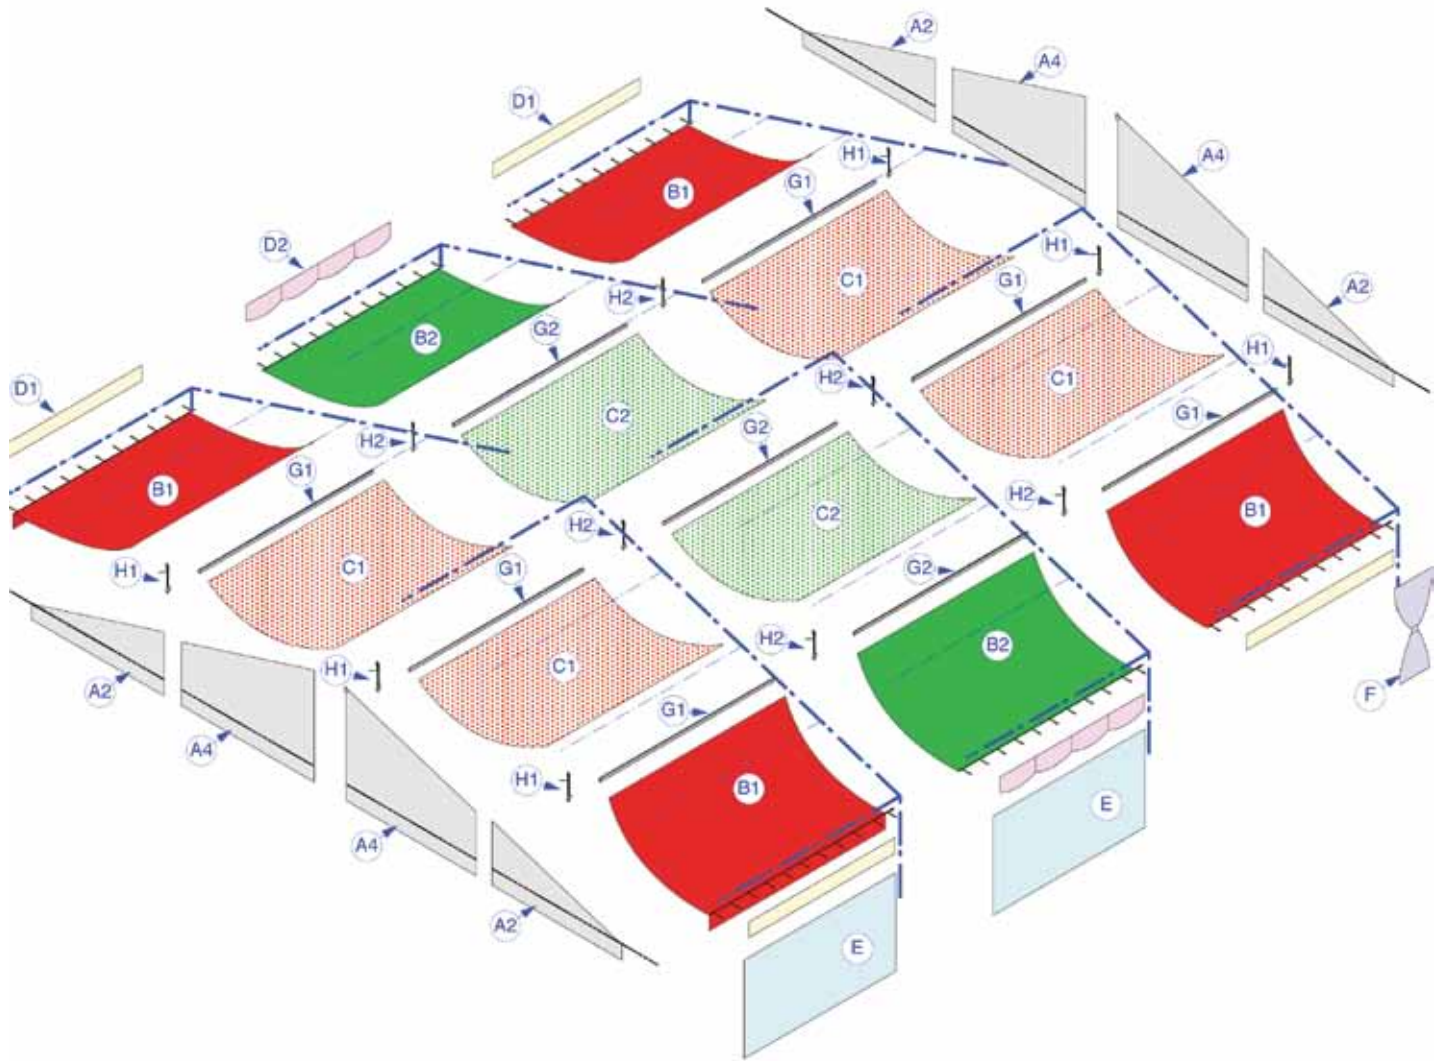

## MOD Triple Rail Liner: Components

Ref.	Part Name
A2	Pr of Gable Infills - Two Piece
A4	Pr of Gable Inserts - Two Piece
B1	E to K End Panel - Detachable Valance
B2	E to K Mid Panel - Detachable Valance
C1	K to K End Panel
C2	K to K Mid Panel
D1	Detachable Valance - Plain
D2	Detachable Valance - Swagged
E	Wall
F	Leg Drape
G1	Mod Rail - End
G2	Mod Rail - Mid
H1	Mod Rail Connector & Halyard Assy - End
H2	Mod Rail Connector & Halyard Assy - Mid