



THERE'S NO STOPPING US.
BUILDING AND CLEARSPAN LINERS
UP TO 50m WIDE.

MOD Series Liner

Hiding unsightly roofs and beams with custom made liner systems, the most advanced system in our Baytex Liner range.

SIMPLICITY · PERFORMANCE · STYLE



Keeping you covered and adding style

Fabric

Baytex Liners are manufactured from 100% polyester fire retardant fibre for maximum durability and easy care.

All Baytex Silkline fabrics are inherently flame retardant, they have a soft finish with a beautiful silky sheen that resists hard creasing.

Configurations

Lining sections available as Gable Infills or Mid Sections. Available in either flat or gathered styles. 5m E-K MOD panels (eave to Keder) available in 5m lengths. Hoop Rail extrusions are supplied in 1 piece as standard or as a 2 piece assembly for easy transportation. Supplied with all pulleys, halyards, alloy hoop rail and mounting hardware.

Specifications

All linings are supplied in colour coded carry bags. Valances are included as standard.

Fire Rating Certificates & Flame Retardance

- DIN 4102-1
- AS/NZ 1530;PtsII & III
- NTA 8007:2007 'Brandgedrag van Verseiringsmaterialen Classification B
- NF P 92-512:1986-M1
- BS5867 Part 2 Type B
- NFPAI 701 (small scale)
- CPAI-84
- New York Board - Bull #44

Simple Set Up

Hop Rails are attached with shackles and web straps.

Load points are locked together with sister clips.

Panel joints between each bay width are closed with continuous velcro tape. Installation is accomplished from ground level.

Manufacturing

CAD designed and computer cut for dimensional accuracy.

Manufactured onsite at Baytex as for the last 40 years.



Non
Flammable









Easy
Care



Machine
Washable


Silkline FR75
(2 oz) for gathered liners
Silkline FR300
(6 oz) for flat/smooth liners

MOD Series is the most advanced system of the Baytex Linings range. Key to this system is our unique alloy Hoop Rail extrusion. Intended for installation in clear span structures from 10m-50m wide with a bay width of 5m. The MOD Series can also be custom designed to suit virtually any building space.



MOD Series single or multiple runs of hoop rail are joined down the length of the structure and suspended from the attachment points in each rafter beam.

For single rail installations, each MOD panel is slid into the keder groove of the Hoop Rail and attached into the structure eave via the Track Hook system (or keder grooves). The Track Hooks are locked into place with a bungee cord stretched between the ends of each structure eave purlin. Panel joints between each bay width are closed with continuous velcro tape.

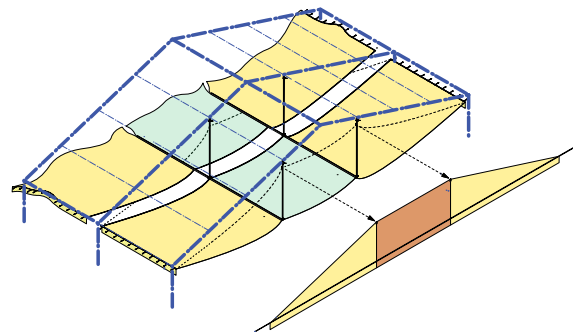

Lining Accessories

Wall Liners
Leg Drapes

Colours



Black



White



Champagne

Non standard fabric colours are available on request.

New Zealand

52 Newton Street,
PO Box 4370, Mount Maunganui
New Zealand

tel +64 7 579 0190
fax +64 7 579 0194
www.baytex.co.nz

Australia

tel 02 4340 4144
mob 0400 312 314

